

Vinyl-Coated Drip Edge

Description:

The Vinyl-Coated Drip Edge provides maximum water flow from roof decks while providing an architectural, visually-attractive termination.

- Fabricated from vinyl-coated metal with a 6" attached PVC membrane skirt in 10' lengths; 2"–8" widths.
- Profiles can be custom-fabricated to meet most specifications.
- Can be fabricated to accommodate various roof pitches and mansards with a maximum face size of 8".
- Available in white, tan, gray, or dark gray and can be painted with latex or acrylic paint to match building design.




Energy Efficiency:

LEED® and ENERGY STAR® compliant.

Installation:

1. A wood nailer is required if 1" or greater of insulation is used.
2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with EXCEPTIONAL® Metals Detail #3120.
4. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the EXCEPTIONAL Metals Technical Department.

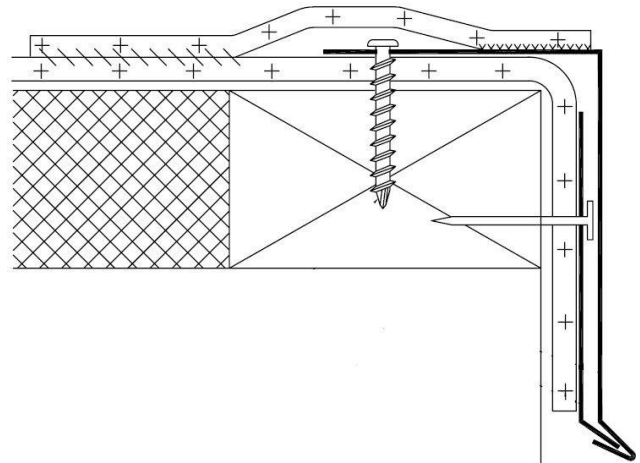

Warranty:

EXCEPTIONAL Metals offers a finish and substrate warranty. Contact the membrane manufacturer for any additional warranty that may be offered.

Technical Services:

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call EXCEPTIONAL Metals.

Material	Gauge	Finish
Galvalume®	24-gauge	PVC
Stainless Steel	24-gauge	PVC
Aluminum	.040	PVC